



 **CLEVER CLICK**  
Luxury Vinyl Flooring



Revolutionary, quick and easy flooring with  
the natural beauty of wood and stone

## What is Clever Click?

Available in a range of both Wood and Stone designs, Clever Click is a revolutionary, easy-to-install technology which cuts installation time by half compared to traditional vinyl flooring.

Clever Click technology removes the need for adhesive and lengthy room preparation, meaning your new floor can be installed in next to no time.

Designed to work over existing flooring substrates including floorboards, concrete and tiles

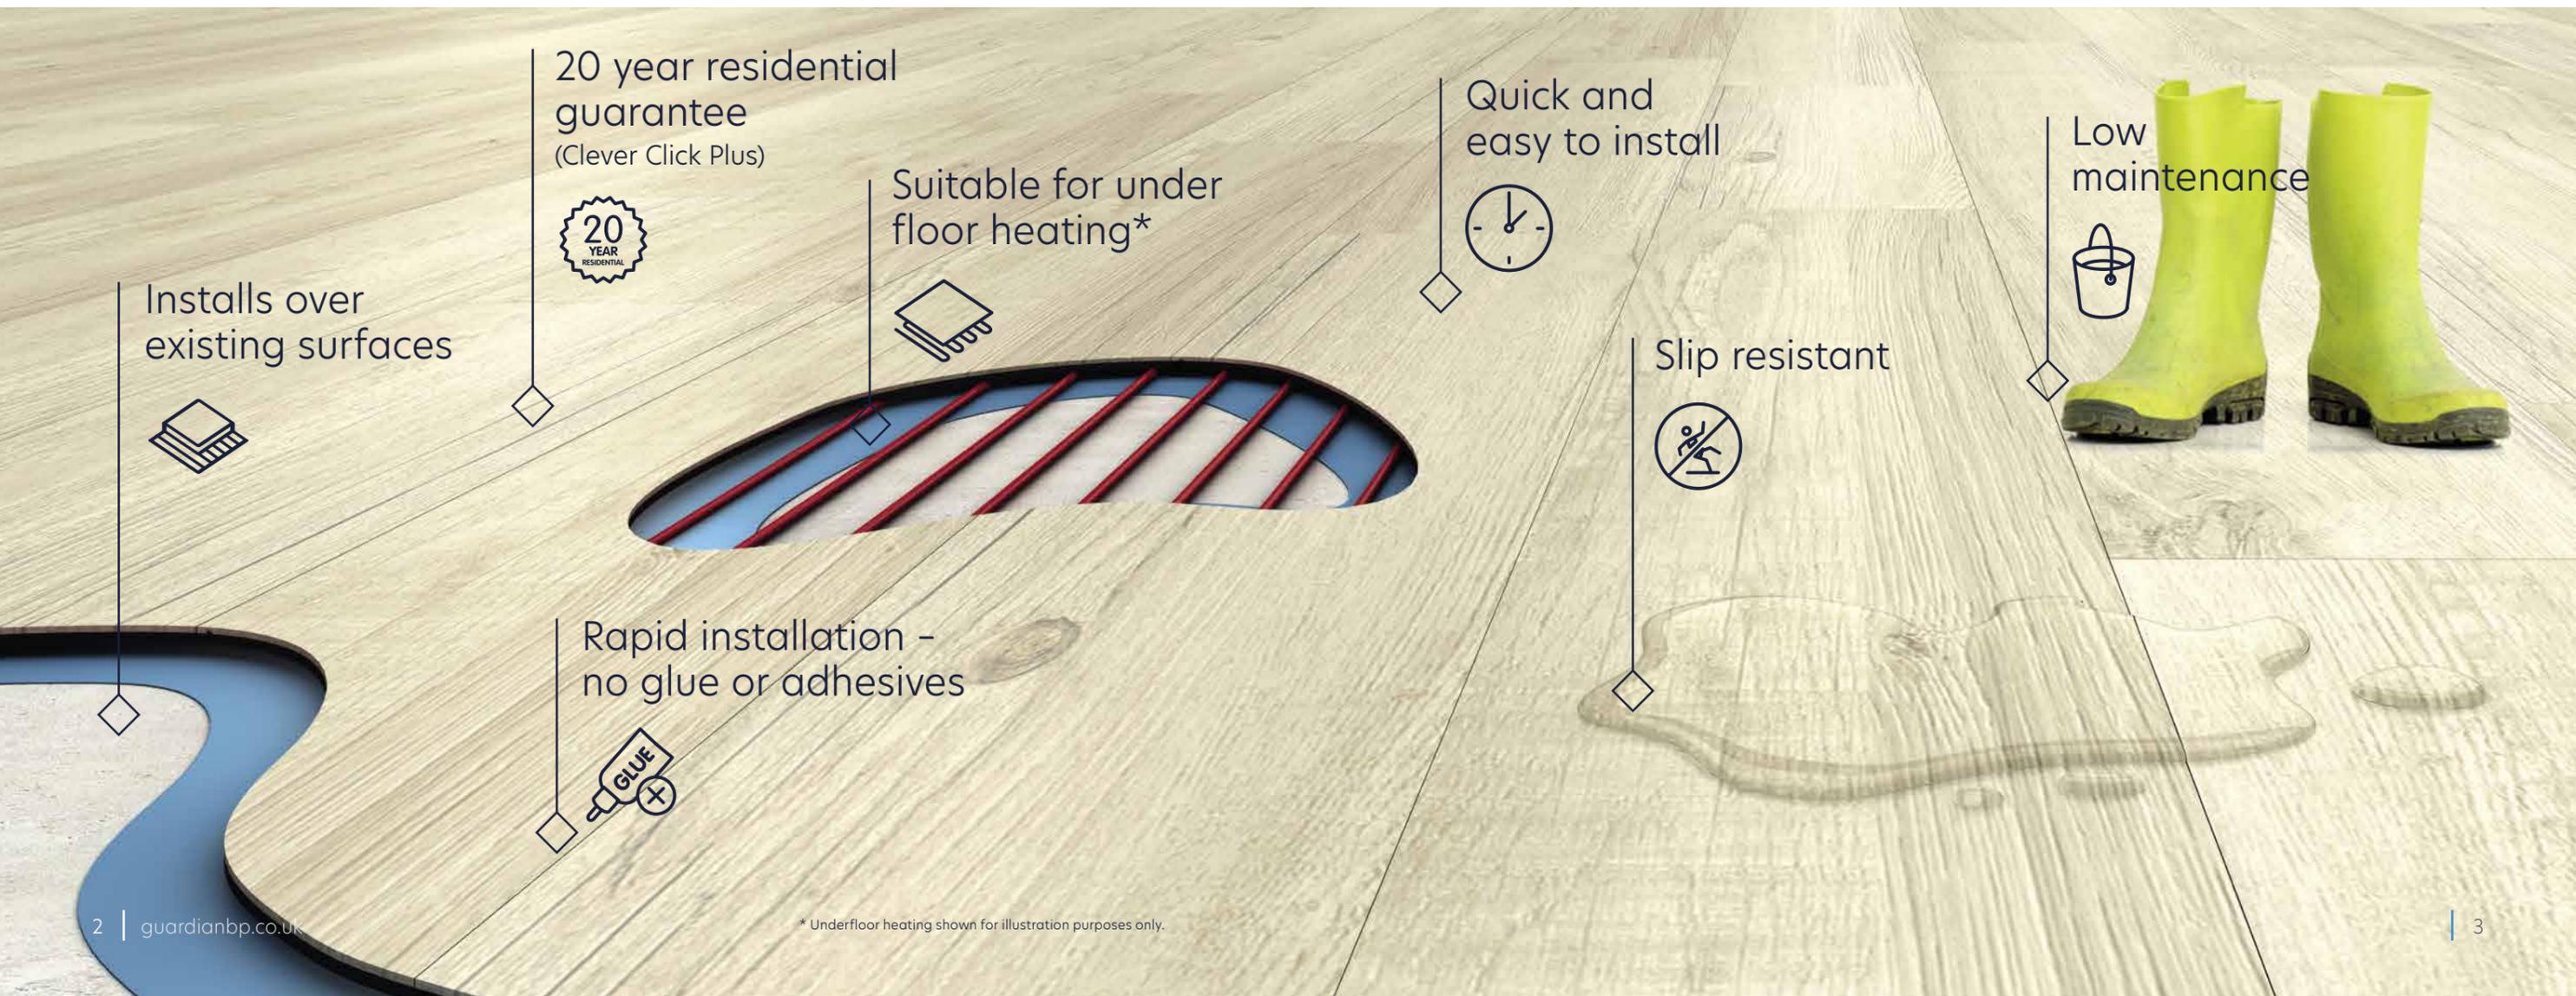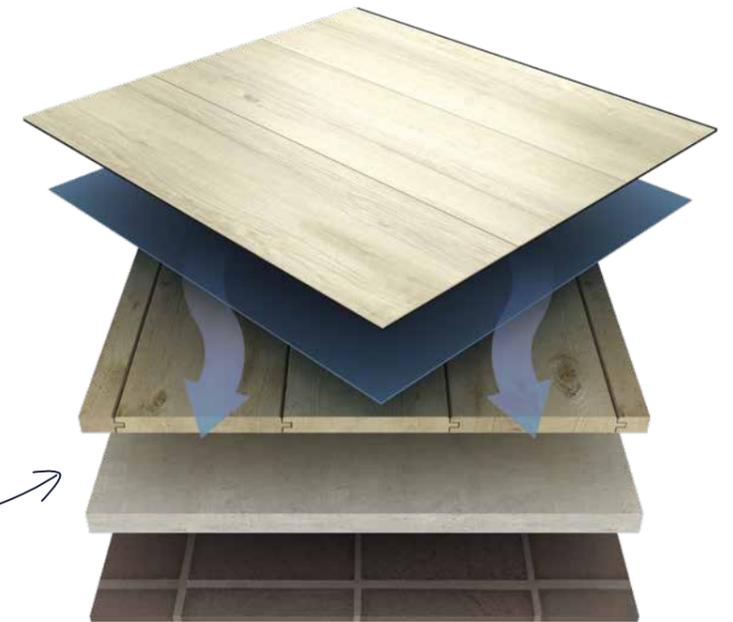

# Why choose Clever Click?

Clever Click is designed to provide all the stunning detail and outstanding natural beauty of conventional wood and stone floors – but at an affordable price.

Simple yet stylish patterns, that capture the natural elegance of stone and wood, create a feeling of tranquillity in a room.

Inspired designs, combined with the practical advantages of wear-resistant vinyl, create floors that function effectively in any room or environment.

Choose from the **Clever Click Plus** and **Clever Click** ranges – contemporary and classic designs that ensure you'll always find something to match your style.

- ◆ Gives any space a warm atmosphere.
- ◆ Adaptable to interior styles.
- ◆ Makes any space bigger and brighter.
- ◆ Natural palette so doesn't date quickly.
- ◆ Dirt-repellent and low maintenance.
- ◆ Ideal for renovations.

 Scuff and Stain Resistant	 Clever Click Plus Residential Guarantee	 Clever Click Plus Commercial Guarantee	 Clever Click Residential Guarantee	 Clever Click Commercial Guarantee	 Water Resistant	 Natural Look and Feel	 No Glue Required	 Patented Technology
 Quick and Easy Installation	 Easy to Clean and Maintain	 Warm and Quiet Under Foot	 Superguard Protected	 Suitable for all Rooms	 No Delamination	 Slip Resistant	 Eco-friendly Solution	 Made in the EU


# **CLEVER CLICK PLUS**

## Designer Floors: Stone Selection


Thickness: 4.5mm. Wear layer: PU 0.55mm.  
Coverage: 1.49m<sup>2</sup> per box.



Dorato Stone  
324mm x 655mm

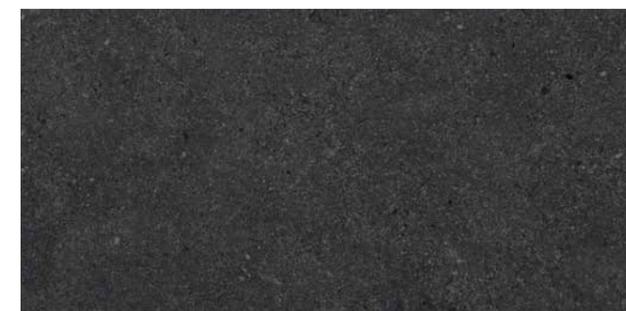

Orion Jet Stone  
324mm x 655mm

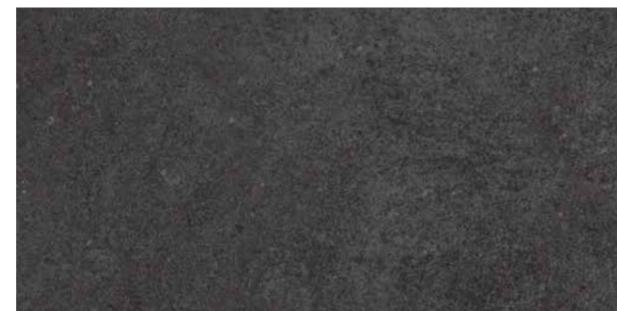

Florentine  
324mm x 655mm



Monterey Stone  
324mm x 655mm



Clever Click Joint



4-sided  
Bevel

# **CLEVER CLICK PLUS**

## Designer Floors: Wood Selection

Thickness: 4.5mm. Wear layer: PU 0.55mm.  
Coverage: 1.76m<sup>2</sup> per pack.  
Wood selection embossed and registered.



Chestnut Oak  
191mm x 1316mm



Scarlet Oak  
191mm x 1316mm



Bear Oak  
191mm x 1316mm



White Oak  
191mm x 1316mm



Smoked Oak  
191mm x 1316mm



Whitewash Pine  
191mm x 1316mm



Clever Click Joint



4-sided  
Bevel



Clever Click Plus  
Smoked Oak

# **CLEVER CLICK**

## Designer Floors: Stone Selection

Thickness: 4.5mm. Wear layer: PU 0.30mm.  
Coverage: 1.49m<sup>2</sup> per box.



Ventura  
324mm x 655mm



Belmont  
324mm x 655mm



Galveston Stone  
324mm x 655mm



Burlington Stone  
324mm x 655mm



Clever Click Joint



Micro Bevel

**CLEVER CLICK**

Designer Floors: Wood Selection

Thickness: 4.5mm. Wear layer: PU 0.30mm.  
Coverage: 1.76m<sup>2</sup> per pack.



Claremont Oak  
191mm x 1316mm



Denver Oak  
191mm x 1316mm



Hartford Wood  
191mm x 1316mm



Huntington Wood  
191mm x 1316mm



Pontiac Oak  
191mm x 1316mm



Portland Wood  
191mm x 1316mm



Clever Click Joint



Micro Bevel



# It all starts with a solid foundation...



## Xtrafloor Power

Made of up to 90% natural raw materials, our Power standard underlay is 100% recyclable. Power boasts excellent thermal conductivity, making it the perfect choice for rooms with underfloor heating or cooling.

This elastic underlay smooths out small subfloor irregularities; 1 metre wide x 10 metres long x 1.55mm thick. Its lightly tackified surface prevents LVT movement, allowing for an easier installation of your vinyl floor. The protective film captures all dust particles, making it possible to install the underlay while carrying out other work in the room.



## Xtrafloor GO

Is noise affecting your living comfort? Or are you trying to meet the current building regulations? Acoustic underlay is just what you need. Perfect for upper floors or flats in multi-storey buildings, GO blocks different types of noise, from footfall to vibrations.

Extensively tested and officially certified, this sound-damping underlay shows outstanding impact sound reduction values of  $\Delta L_w=19\text{dB}$  in combination with 4.5mm Clever Click Plus or Clever Click.

A remarkable performance backed by official certificates. Enjoy the peace and quiet with Xtrafloor GO. Suited for under floor heating and cooling, the extruded closed-cell polyolefin foam material increases your floor's thermal insulation.

Roll size: 980mm wide x 15.3 metres long x 1mm thick.



## Starter Kit

The starter kit is designed to keep your luxury vinyl floor looking its best for years to come and includes:

- ◆ 1L cleaner maintainer
- ◆ 500ml floor spill cleaner, flat cap loose trigger
- ◆ 1 pack of felt pads
- ◆ 1 non-abrasive sponge/scourer
- ◆ 6 blue cleaning cloths
- ◆ Promotional literature
- ◆ Instruction sheet

## Xtrafloor Cleaner Maintainer

Our concentrated cleaner has a fresh aroma for routine cleaning. Suitable for use with all cleaning methods including manual, spray buffing and scrubber-drying. Availability: 1ltr / 2.5ltr.

## Xtrafloor Spot Remover

A ready to use cleaner with a fresh aroma and formulated for removal of spills and other deposits. Availability: 500ml.

## Xtrafloor Hand Roller

Ensures a smooth click. A handy tool that, unlike hammers, will not damage your Clever Click floor.



Total solution for residential purposes

Smooths out subfloor irregularities 5mm in width, 2mm in height

Improved sound insulation  $\Delta L_w=13\text{dB}$  with 4.5mm Clever Click Plus or Clever Click

Lightly tackified surface and dust-capturing protective foil for easy installation

Smooths out subfloor irregularities 5mm in width, 2mm in height

Improved sound insulation  $\Delta L_w=19\text{dB}$  with 4.5mm Clever Click Plus or Clever Click

Non-skid coating for quick and easy installation

# Technical Specifications

**100%**  
DESIGNED  
& MADE IN  
BELGIUM

		CLEVER CLICK PLUS		CLEVER CLICK	
Level of use	EN ISO 10874	23 - 33 - 42	23 - 33 - 42	23 - 31	23 - 31
Total thickness	EN ISO 24346	ca. 4.5mm	ca. 4.5mm	4.5mm	4.5mm
Wear layer	EN ISO 24340	ca. 0.55mm	ca. 0.55mm	0.30mm	0.30mm
Wear layer PUR treatment	-	Superguard®			
Total weight kg/m <sup>2</sup>	EN ISO 23997	ca. 7.68	ca. 7.68	7.82	7.80
Plank / Tile size	EN ISO 24342	191mm x 1,316mm	324mm x 655mm	191mm x 1,316mm	324mm x 655mm
Pieces per box	-	7	7	7	7
Coverage per box	-	1.76m <sup>2</sup>	1.49m <sup>2</sup>	1.76m <sup>2</sup>	1.49m <sup>2</sup>
Inflammability	EN 13501	Bfl-S1			
Scratch resistance	EN ISO 660-2	Class T			
Squareness & straightness	EN ISO 24342	≤ 0.35mm			
Slip resistance	EN 13893	DS			
Slip restraint	DIN 51130	R10	R10	R10	R10
Residual indentation	EN ISO 24343-1	≤ 0.10 mm			
Furniture leg resistance	EN ISO 16581	No cracks, no damage			
Curling	EN ISO 23999	≤ 2mm			
Electrical resistance	EN 1081	≤ 10 <sup>9</sup> hm			
Dimensional stability	EN ISO 23999	Norm: ≤ 0.25%. Average result measured: ≤ 0.05%			
Heat insulation	EN ISO 10456	0.25w/(m.K)			
Thermal resistance R	EN 12664	0.0159m <sup>2</sup> .K/W	0.0159m <sup>2</sup> .K/W	0.0154m <sup>2</sup> .K/W	0.0154m <sup>2</sup> .K/W
Electrostatic performance	EN 1815	< 2kV			
Fomaldehyde group	EN 717-1	E1			
Acoustic insulation	EN ISO 717-2	4dB			
Castor chair resistance	EN ISO 4918	No damage to wearlayer, no delamination			
Stain resistance	EN ISO 26987	Very good			
Light fastness	EN ISO 105-B02	≥ 6			
Underfloor heating	EN 12524	Suitable, max 27°C			
Resistance to chemicals	EN 423	Very good	Very good	-	-
Warranty	-	20 yrs Residential / 10 yrs Commercial		12 yrs Residential / 5 yrs Commercial	

The warranty covers manufacturing defects and premature wear in the event of normal use.



---

## Roofing & Cladding Solutions

- ◆ Guardian Roof Slate
- ◆ Promenade Tile
- ◆ Soffits & Trims
- ◆ Gutter Brush

---

## Landscape Solutions

- ◆ DuraDek Composite Decking
- ◆ RubberLok Safety Tiles
- ◆ SafetyGrass Rubber Matting
- ◆ RubberLok Utility Mats

---

## Flooring Solutions

- ◆ Clever Click Luxury Vinyl Flooring
- ◆ Accessories & Trims
- ◆ RubberLok Utility Mats

---

## Interior Solutions

- ◆ Decorative Wall & Ceiling Cladding
- ◆ Accessories & Trims
- ◆ Hygienic PVC Sheets
- ◆ Skirting & Architrave
- ◆ Window Boards & Trims



Guardian Building Products

Tel: 01332 296844 Email: [info@guardianbp.co.uk](mailto:info@guardianbp.co.uk)

[www.guardianbp.co.uk](http://www.guardianbp.co.uk)

